



Lexmark XC2335

Exceptional performance, secure and sustainable



Lexmark XC2335

With exceptional performance and secure design, the XC2335 Multifunction printer (copy/scan/print/fax) delivers enhanced productivity, up to 35 ppm* on letter paper and toner yields up to 20,000 pages mono**, and up to 11,700 pages color**. Engineered for long life with environmental certifications and advanced power management, this efficient model has high sustainability. Fast time to first print, superior print quality and easy-to-use touch screen.

Secure by design

Lexmark expertise helps customers protect their data, their device and their network. Our security ecosystem is designed to overcome the most complex data challenges. And now we've added the Trusted Platform Module (TPM)***, which includes on-board authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint. TPM meets stringent industry and US government security standards including Common Criteria and Federal Information Processing Standard (FIPS).

Proprietary technology

We own core technology across hardware, firmware, services, and solutions, creating seamless connections designed to reduce the risk of security gaps between your document, your device and your network. Our expertise is our customer's benefit.

Sustainability

With certifications in Energy Star®, Blue Angel, RoHS, EPEAT® Silver. Models are sustainable for today and beyond. Lexmark is an industry leader of recycled content with products using at least 35% PCR content and continual focus on improvement. This line is also engineered for Long Life and designed to last and reduce waste.

Intelligent Design

Every touch point is designed to withstand high usage while meeting accessibility standards. Steel frames support the device and provide durability to help ensure consistent long-term performance. Products are designed for long service life with long-life components and are easily serviced with few tools.



Optimized productivity

Increase productivity with optimized performance. Print at up to 35 pages per minute* (letter) and capture information quickly with scan speeds of up to 52 images per minute (letter) for one-sided scanning, and up to 104 images per minute (letter) for two-sided scanning.

Manageability


These IoT-ready devices can be remotely managed, including setup, configuration, consumables management, and diagnostics. Wireless capability gives freedom of access and remote firmware updates make it easy to upgrade to the latest apps and security features. Our mobile printing app makes it easier to monitor and manage your print jobs from remote locations, all from the touch of your phone.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average yield based on approximately 5% print coverage. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Program (LCCP). Lexmark Return Program cartridges are subject to the terms and conditions of the Lexmark Return Program. See lexmark.com/returnprogram for more information. Regular cartridges without the terms and conditions of the Lexmark Return Program are available on lexmark.com or through Lexmark Channel Partners.

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark XC2335

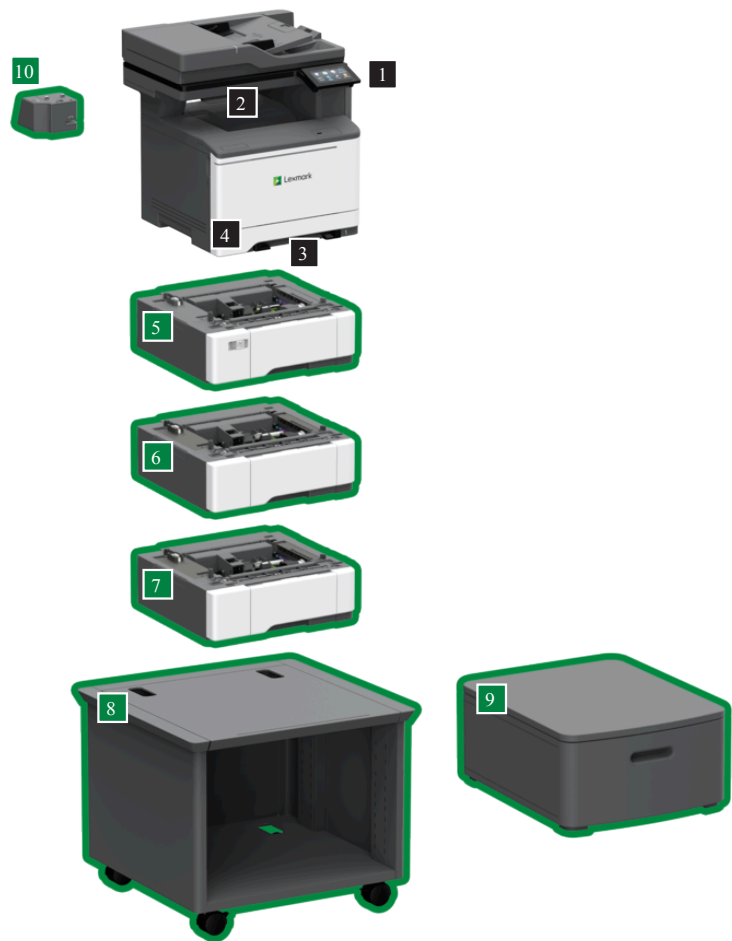

- 1

Multifunction product with 4.3-inch (10.9 cm) touch screen
19.3 x 18.9 x 18.7 in.
491.4 x 479 x 475.1 mm
- 2

200-Sheet output bin
Dimensions included as part of base model
- 3

Single sheet multipurpose feeder
Dimensions included as part of base model
- 4

250-Sheet tray
Dimensions included as part of base model
- 5

650-Sheet Duo Tray
5.2 x 16.7 x 16.4 in.
132.1 x 424.2 x 416.6 mm
- 6

550-Sheet Tray
5.2 x 16.7 x 16.4 in.
132.1 x 424.2 x 416.6 mm

- 7

550-Sheet Tray
5.2 x 16.7 x 16.4 in.
132.1 x 424.2 x 416.6 mm
- 8

Adjustable Stand
20.5 x 25.7 x 24.6 in.
521 x 653 x 625 mm
- 9

Swivel Cabinet
10.4 x 18.7 x 23.6 in.
263 x 476 x 600 mm
- 10

Convenience Stapler LV
3.23 x 4.29 x 4.77 in.

Standard

Optional

P/N	Hardware
50M7180	Lexmark XC2335
P/N	Supplies
24B7537	Lexmark C2335, XC2335 Cyan 11.7K Toner Cartridge
24B7538	Lexmark C2335, XC2335 Magenta 11.7K Toner Cartridge
24B7539	Lexmark C2335, XC2335 Yellow 11.7K Toner Cartridge
24B7540	Lexmark C2335, XC2335 Black 20K Toner Cartridge
35S8500	Lexmark 5-Pack 5K Finisher Staples
75M0W00	Lexmark CS531, 632, 639, CX532, 635, C2335, XC2335 30K Waste Toner Bottle
75M0ZK0	Lexmark CS531, 632, 639, CX532, 635, C2335, XC2335 Black Return Program 150K Imaging Kit
75M0ZV0	Lexmark CS531, 632, 639, CX532, 635, C2335, XC2335 4-Color Return Program 150K Imaging Kit
P/N	Paper Handling
47C4500	Convenience Stapler
50M7550	550-Sheet Tray
50M7650	650-Sheet Duo Tray
P/N	Memory Options
27X0805	500+ GB Hard Disk
57X9528	Intelligent Storage Device (ISD)
P/N	Application Solutions
57X0300	Contact Authentication Device
57X0301	Contactless Authentication Device
82S1203	IPDS License
82S1204	Bar Code License
P/N	Connectivity
1021294	USB Cable (2-meter)
57X7040	English Keyboard Kit
SPD0001	Surge Protective Device, 110-120V
P/N	Furniture
3073173	Swivel Cabinet
40C2300	Adjustable Stand

Up to 3 optional 550-sheet trays, or one optional 650-sheet duo tray and up to 2 optional 550-sheet trays with the 650-sheet duo tray on top
All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at https://publications.lexmark.com/publications/furniture_safety

Product Specifications		Lexmark XC2335
Printing		
Display	Lexmark e-Task 4.3-inch color touch screen	
Print Speed	Up to: Black: 35 ppm ¹ (Letter) / Color: 35 ppm ¹ (Letter)	
Time to First Page	As fast as: Black: 7.2 seconds / Color: 7.5 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 Color Quality / Color: 4800 Color Quality, 1200 x 1200 dpi	
Memory	Standard: 2048 MB / Maximum: 2048 MB	
Hard Disk	Intelligent Storage Drive available; Intelligent Storage Drive standard (50M7190, 50M7191, 50M7192, 50M7193, 50M7196) ; Magnetic Hard Disk available	
Recommended Monthly Page Volume	1,500 - 10,000 pages ²	
Maximum Monthly Duty Cycle	Up to: 100,000 pages per month ³	
Copying		
Copy Speed	Up to: Black: 35 cpm ¹ (Letter) / Color: 35 cpm ¹ (Letter)	
Time to First Copy	As fast as: Black: 7.637 seconds / Color: 7.684 seconds	
Scanning		
ADF Scan	DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed	Up to: Black: 98 / 104 sides per minute / Color: 68 / 72 sides per minute	
A4/Ltr Simplex Scan Speed	Up to: Black: 49 / 52 sides per minute / Color: 34 / 36 sides per minute	
ADF Paper Input Capacity	Up to: 100 pages 20 lb or 75 gsm bond	
Faxing		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁴		
Laser Cartridge Yields	up to: 20,000 ⁵ -page Black Cartridge / up to: 11,700 ⁵ -page Color (CMY) Cartridges	
Cartridge(s) Shipping with Product	3,000 ⁵ -page Black Return Program Toner Cartridge ⁵ , 2,000 ⁵ -page Color (CMY) Return Program Toner Cartridges ⁵	
Paper Handling		
Included Paper Handling	200-Sheet Output Bin, Integrated Duplex, Single sheet multipurpose feeder, 250-Sheet Tray	
Optional Paper Handling	650-Sheet Duo Tray, 550-Sheet Tray	
Paper Input Capacity	Up to: Standard: 251 pages 20 lb or 75 gsm bond / Maximum: 2001 pages 20 lb or 75 gsm bond	
Paper Output Capacity	Up to: Standard: 200 pages 20 lb or 75 gsm bond / Maximum: 200 pages 20 lb or 75 gsm bond	
Media Types Supported	Vinyl Labels, Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope	
General Information ⁶		
Standard Ports	Gigabit Ethernet (10/100/1000), MarkNet N8370 802.11 a/b/g/n/ac, Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B)	
Noise Level	Operating: 50 dBA (Print) / 50 dBA (Copy) / 43 dBA (Scan)	
Specified Operating Environment	Altitude: 0 - 2900 Meters (9,500 Feet) / Humidity: 15 to 80% Relative Humidity / Temperature: 10 to 32.2°C (50 to 90°F)	
Limited Warranty	See Statement of Limited Warranty: 1-Year Onsite Service, Next Business Day	
Size / Weight	H x W x D: 19.3 x 18.9 x 18.7 in. / 59.5 lb.	
ENERGY STAR Typical Electricity Consumption	TEC: 0.51 kilowatt-hours per week	

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average yield based on approximately 5% print coverage.

⁶ Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

© 2023 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA®, the Mopria® Logo and the Mopria Alliance™ logos are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).



lexmark.com